



# Wise Pro



## Ethernet Gateway 4

### General Description

BZ-COM Ethernet Gateway 4 allows your Wireless Sensors to communicate with the Online Wireless Sensor Monitoring and Notification System without the need for a PC. Simply provide power and plug the gateway into an open ethernet network port with an internet connection. It will then automatically connect with our online servers, providing the perfect solution for commercial locations where there is an active internet connection.

The Ethernet Gateway 4 allows your Wireless Sensors to communicate with the system via ethernet transmission. Ethernet Gateways are advanced wireless IoT gateways that enable fast time-to-market solutions. Ethernet Gateway 4 is specifically designed to respond to the increasing market need for global technology that accommodates a variety of vertical IoT application segments and remote wireless sensor management solutions.

### Example Applications


- Remote Location Monitoring
- Shipping and Transportation
- Agricultural Monitoring
- Vacant Property Management
- Vacation Home Property Management
- Construction Site Monitoring
- Data Center Monitoring


### Ethernet Gateway 4 Features

- Wireless range of 1,200+ feet through 12+ walls \*
- Frequency Hopping Spread Spectrum (FHSS)
- Improved interference immunity
- Encrypt-RF® Security (Diffie-Hellman Key Exchange + AES-128 CBC for sensor data messages)
- 15,000 sensor message memory
- Over the air updates (future proof)
- True plug & play, no hassles for internet configuration set-up
- No PC required for operation
- Local status LEDs with transmission and online status indicators
- AC power supply




\* Actual range may vary depending on environment.
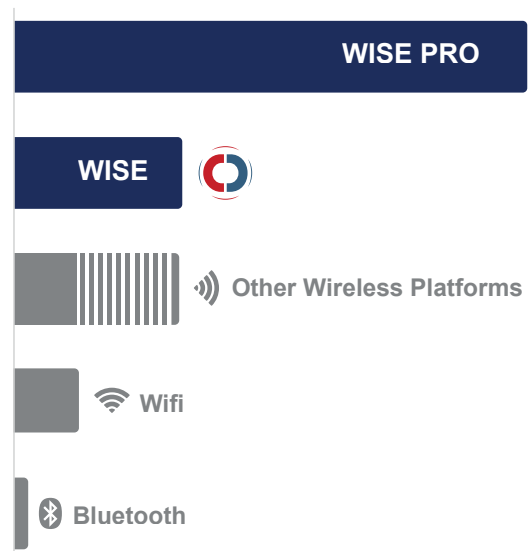
### Wireless Range Comparison

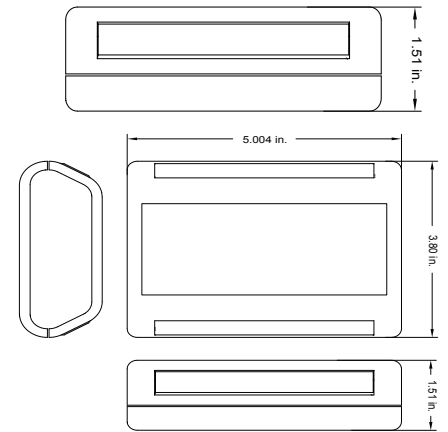



## Ethernet Gateway 4 Specifications

Models		
Ethernet	MNG2-x-EGW-CCE **	
Ethernet + POE	MNG2-x-EGW-CCE-POE **	
Ethernet		
Hardware	10/100 Ethernet Controller	
IEEE Standard Compliance	802.3-2002	
Operation	Full- and Half-Duplex	
Cross-Over Correction	Automatic MDI/MDI-X	
Protocols Supported	DHCP, DNS, NTP, UDP, TCP, SNMP, Modbus TCP	
Cable Connector	RJ45	
Device Memory	Up to 50,000 sensor messages; varies based on sensor type. (Sensor messages will be stored in the event of Internet outage and transferred when connection is restored)	
Power		
Input Power	5.0 VDC @ 1A	
Ethernet + POE variant	802.3AF Class 1 Compliant	
Mechanical		
LEDs	Connectivity, Server, Network Status	
Enclosure		
Dimensions	5.004 x 3.8 x 1.51 in.	
Weight	7 ounces	
Environmental		
Operating Temperature	-20to +70°C (-4 to 158°F)	
Storage Temperature	-40 to +85°C (-40 to 185°F)	
Wireless		
Transmit Power	25 mW (900 MHz), 17 mW (868 MHz), 6.3 mW (433 MHz)	
Antenna Types	Connector: RP-SMA Gain: 2.5 dBi (433 MHz Product) 3.0 dBi (868 MHz, 400 MHz Product)	
Wireless Range	1,200+ ft. non-line-of-sight *	
Security	Encrypt-RF® (256-bit key exchange and AES-128 CTR)	
Certifications		
  	900 MHz product; FCC ID: ZTL-G2SC1 and IC: 9794A-G2SC1. 868 and 433 MHz product tested and found to comply with: EN 300 220-2 V3.1.1 (2017-02), EN 60950/62368-1	