


Rugged Tablet PC

EM-T11P

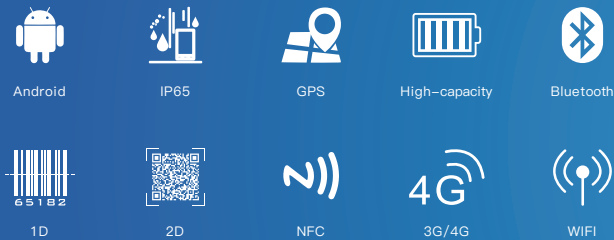

Functions

- Support for Android 11 system
- Optional 3G/4G all network communication, WiFi, Bluetooth and other communication modes
- 8000mAh battery, 8 hours of machine endurance
- IP65 high protection level, in accordance with MIL-STD-810G
- Support GPS, Glonass, Beidou, more accurate positioning
- Support 13 million pixel auto focus camera, easy to collect images and video information
- Support 1D/2D, NFC and other functional modules for free selection

Product Six Views



Specification Parameter

Basic parameters	
Dimension	275.7 x 187.5 x 24.5mm
Weight	device unit 1000g
Device Color	black
LCD	10.1 inch IPS 16:10, 800x1280, 450nits
Touch Panel	5 point G+G capacitive touch screen
Camera	Front 5.0MP Rear 13.0MP
I/O	USB 2.0 Type-A x 1, USB Type-C x 1, SIM Card x 1, TF Card x 1, HDMI 1.4a x 1, 12pins Pogo Pin x 1, Φ3.5mm standard earphone jack x 1, Φ3.5mm DC jack x 1
Power	AC100V ~ 240V, 50Hz/60Hz, Output DC 5V/3A
Communication	
WIFI	WIFI 802.11 a/b/g/n/ac (2.4G+5G/5.1G+5.8G)
Bluetooth	BT4.2
2G/3G/4G (Optional)	LTE Cat 7 GSM & WCDMA & TD-S (B34, B39) & TDD (B38, B39, B40, B41) & FDD (B1, B2, B3, B4, B5, B7, B8, B17, B20, B28a&b)
GNSS	Built-in GPS, Glonass, Beidou(G+G+B)

Performance parameter	
CPU	MTK(Octa-Core), 2.0GHz
OS	Android 11
RAM	4GB/6GB
ROM	64GB/128GB
Battery	
Capacity	3.7V/8000mAh
Type	Built-in Li-polymer battery
Endurance	9hrs (50% volume sounds, 200 lumens brightness, 1080P HD video display by default)
Data Collection	
NFC	Built-in, 13.56MHz, ISO/IEC 14443A/B, ISO/IEC 15693, ISO/IEC 18092
1D	Optional, MOTO SE655E100R
2D	Optional, Honeywell N3680
Reliability	
Operate Temperature	-10 °C ~ 50 °C
Store Temperature	-20 °C ~ 60 °C
Humidity	95% Non-Condensing
Rugged Feature	IP65 certified, MIL-STD-810G certified
Drop Height	1.22m

Accessories



Docking Charger



Hand-strap



Vehicle Mount

Application Range

Various modules and accessories can be selected to meet customers' application in various industries.

