



EM-I14A

Enterprise-Grade Rugged Tablet

- 12th Gen Intel® Core™ i5/i7 processor
- 14-inch HD&HB screen, the back features a rotating handle
- 53.58Wh+14.4Wh dual batteries, large battery supports hot-swapping
- Intel® Iris® Xe Graphics eligible
- Wi-Fi 6/4G/5G/BT 5.1, multiple communication options
- Built-in NFC, fingerprint module, optional 2D barcode scanner






Durability	<ul style="list-style-type: none"> MIL-STD-810H certified 4ft, 26 drops (each side, edge, and corner) IP65 compliant ±4kV contact discharge, ±8kV air discharge
Operating System	<ul style="list-style-type: none"> Windows 11 Pro Optional Windows 11 Home/IOT
Processor	<ul style="list-style-type: none"> Intel i5-1235U (12MB cache, up to 4.4 GHz, 10 cores, 12 threads, TDP 15W) Optional Intel i7-1255U (12MB cache, up to 4.7 GHz, 10 cores, 12 threads, TDP 15W)
Graphics	<ul style="list-style-type: none"> Intel® Iris® Xe
Memory	<ul style="list-style-type: none"> 16GB DDR5 SO-DIMM Optional 32GB DDR5
Storage	<ul style="list-style-type: none"> 256GB PCIe SSD Optional 512GB/1TB SSD
Display	<ul style="list-style-type: none"> 14.0" FHD (1920x1080), 1000 nits 10-point capacitive touch screen, supports glove touch mode
Audio	<ul style="list-style-type: none"> Integrated 3W speaker Integrated microphone Class K
Camera	<ul style="list-style-type: none"> MF 5.0 MP front camera AF 8.0 MP rear camera
Keyboard & Input	<ul style="list-style-type: none"> 6 buttons (2 user-definable key)
Network & Connectivity	<ul style="list-style-type: none"> Intel® Wi-Fi 6 /Wi-Fi 6E (802.11 ax) Bluetooth® 5.1 4G LTE Optional 5G GPS module

Security	<ul style="list-style-type: none"> Integrated TPM2.0 Fingerprint scanner HF-RFID (NFC) reader Kensington lock
Data Capture	<ul style="list-style-type: none"> Optional 2D
I/O Interface	<ul style="list-style-type: none"> Micro SD card x1 SIM card x1 USB 3.2 Gen 2 (Type-A) x1 Thunderbolt 4 (Type-C) x1 3.5mm audio jack x1 HDMI 2.0a mini x1 10/100/1000 Ethernet (RJ45) x2 Fan x1 12-pin Pogo pin x1 (charge & USB) USB 2.0 (Type-A) x2 Serial port (RS232: D-sub, 9-pin) x1 5.5 mm DC in jack x1
Expansion Module	<ul style="list-style-type: none"> Optional 2nd NVME PCIe SSD Optional user-definable PCIe module
Battery & Charging	<ul style="list-style-type: none"> AC adapter: 100–240V, 50Hz–60Hz, 71.82W (19V/3.78A) Li-ion battery, 11.4V, 4700mAh, 6.5h Li-ion battery, 11.1V, 1300mAh Separate RTC 3V/210mAh
Environment	<ul style="list-style-type: none"> Operating temperature: -20°C to 60°C (-4°F to 140°F) Storage temperature: -30°C to 70°C (-22°F to 158°F) Humidity: 95% (non-condensing)
Dimension	<ul style="list-style-type: none"> 366.2 mm(L) x 246.9 mm(W) x 24.8 mm(H)
Weight	<ul style="list-style-type: none"> 2350g
Accessories	<ul style="list-style-type: none"> Standard: Handle, Cable AC, Adapter, Removable battery
Warranty	<ul style="list-style-type: none"> One-year limited warranty standard

1. Please contact your sales representative for feature availability.
2. Battery life data is provided by Emdoor's laboratory. Default test conditions: 300 nits display brightness, 30 cm/70 dB sound level. Actual results may vary depending on test environments and methods.
3. Certified to MIL-STD-810H and IP standards. For specific test items and methods, please refer to the latest official test report.
4. Body dimensions and weight are measured by Emdoor's laboratory. Variations may occur due to measurement methods and manufacturing processes.
5. All product images, specifications, user interface, and features are for reference only and may vary by production batch or other factors. All information is subject to change without prior notice.

ACCESSORIES

Standard

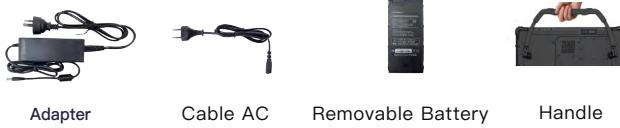

Adapter

Cable AC

Removable Battery

Handle

CONTACT US

Shenzhen Emdoor Information Co., Ltd. (Stock Code: 001314)

Tel: +86-(0)755-2372 2880

Email: marketing.info@emdoor.com

Web: www.emdoorrugged.com

Address: Emdoor Building, No.8 Guangke 1st Road, Pingshan District, Shenzhen